


RR01 145 x 135

Roof Rack

Installation Instructions

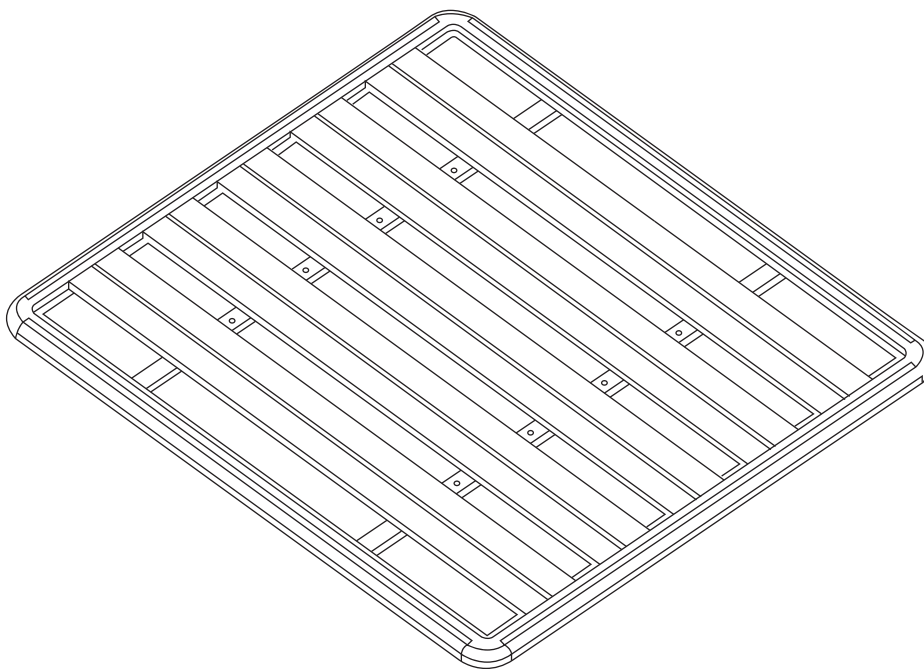

Installation Time: Approx. 30 mins

Place these instructions in vehicle's glove box after installation is complete

General Notes

- Read through the fitting instructions before installation of accessory.
- Always install the accessory following the fitting instructions. Failure to do so may cause damage to the vehicle or the accessory.
- Ensure all recyclable discarded vehicle accessory components and packaging are recycled following local recycling regulations.
- It is always recommended that this accessory is fitted by a qualified Technician.
- Safely store and protect any removed vehicle components.
- Ensure all bare metal surfaces are protected using Automotive Bare Metal Primer and touch-up paint.
- Please check content of kit using this list and subsequent sketches.
- Remove all metal swarf and dust from all vehicle surfaces if surface is used for accessory installation.

Safety Notes

- Check that all work practices comply with safety standards.
- Please wear appropriate clothing and use safety equipment.



Care Instructions:




Clean with mild detergent and water solution.




Do not use abrasive cleaners or solvents.

PARTS LIST



1




M5 x 10 Hexagon Socket
Button Head Screws
Qty - 8

2



M6 x 15 Hexagon Socket
Button Head Screws
Qty - 20

3



M6 x 20 Hexagon Socket
Button Head Screws
Qty - 12

4



D6 Spring Washer
Qty - 32

5




D6 Flat Washer
Qty - 32

6




Front and Rear Fixed
Plate
Qty - 2

7



Main Aluminium Bar
(Left)
Qty - 1

8




Plastic Fixed Part
Qty - 8

9



Main Aliminium Bar
(Right)
Qty - 1

10



Middle Connecting Plate
Qty - 5


11



Middle Fixed Plate
Qty - 2



TOOLS REQUIRED




5/6mm Allen Key




Two
People
Required

INSTALLATION INSTRUCTIONS

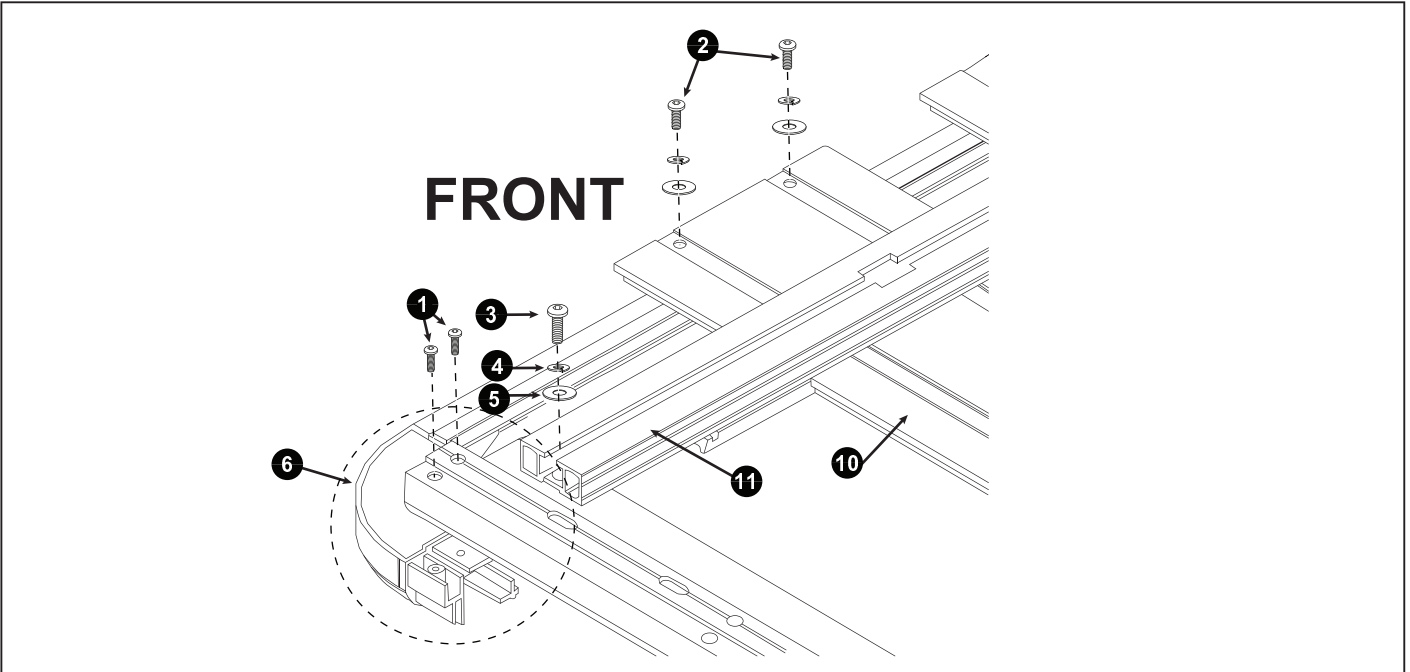

1. Flip Front and Rear Fixed Plate upside down and layer pieces as shown. Connect Man Aluminium Bar (Left) and (Right) to the Front and Rear Fixed Plate and secure. Repeat on all corners. Tighten bar with bolts as shown.

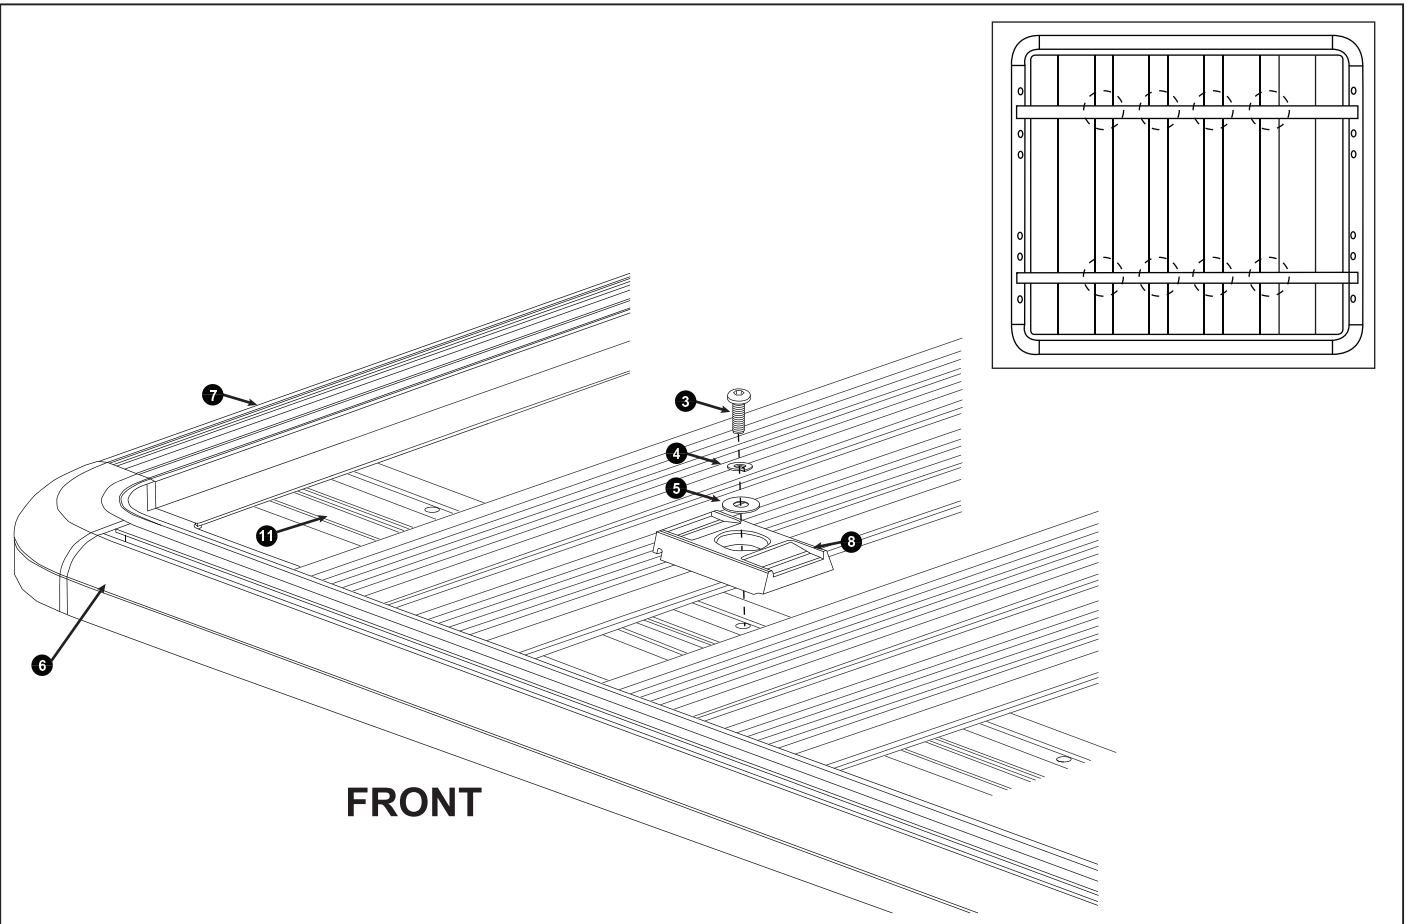

2. Flip Rack right way up and attach Plastic Fixed Part as shown. Fix with M6 x 20 Hexagon Socket Button Head Screw, D6 Spring Washer and D6 Flat Washer. Repeat for all Plastic Fixed parts, as shown.