


RR01 FTH

Roof Rack Bracket Installation Instructions

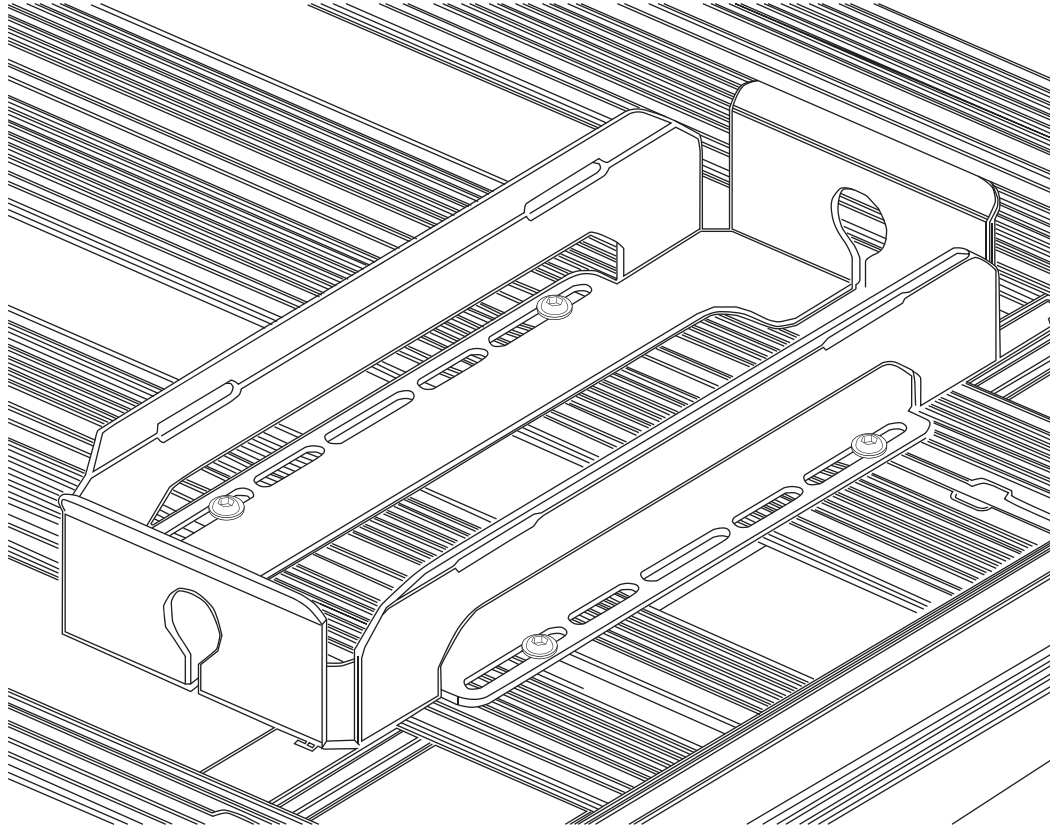

Installation Time: Approx. 30 mins

Place these instructions in vehicle's glove box after installation is complete

General Notes

- Read through the fitting instructions before installation of accessory.
- Always install the accessory following the fitting instructions. Failure to do so may cause damage to the vehicle or the accessory.
- Ensure all recyclable discarded vehicle accessory components and packaging are recycled following local recycling regulations.
- It is always recommended that this accessory is fitted by a qualified Technician.
- Safely store and protect any removed vehicle components.
- Ensure all bare metal surfaces are protected using Automotive Bare Metal Primer and touch-up paint.
- Please check content of kit using this list and subsequent sketches.
- Remove all metal swarf and dust from all vehicle surfaces if surface is used for accessory installation.

Safety Notes

- Check that all work practices comply with safety standards.
- Please wear appropriate clothing and use safety equipment.



Care Instructions:




Clean with mild detergent and water solution.




Do not use abrasive cleaners or solvents.

PARTS LIST




1



M8 x 20 Hex
Socket Button Head Screw
Qty - 4

2



D10 Spring Washer
Qty - 4

3




M10 Washer Plate
Qty - 4

4




D10 Flat Washer
Qty - 4

5



Bracket
Qty - 1

6




Rope
Qty - 2




TOOLS REQUIRED



8mm Allen Key

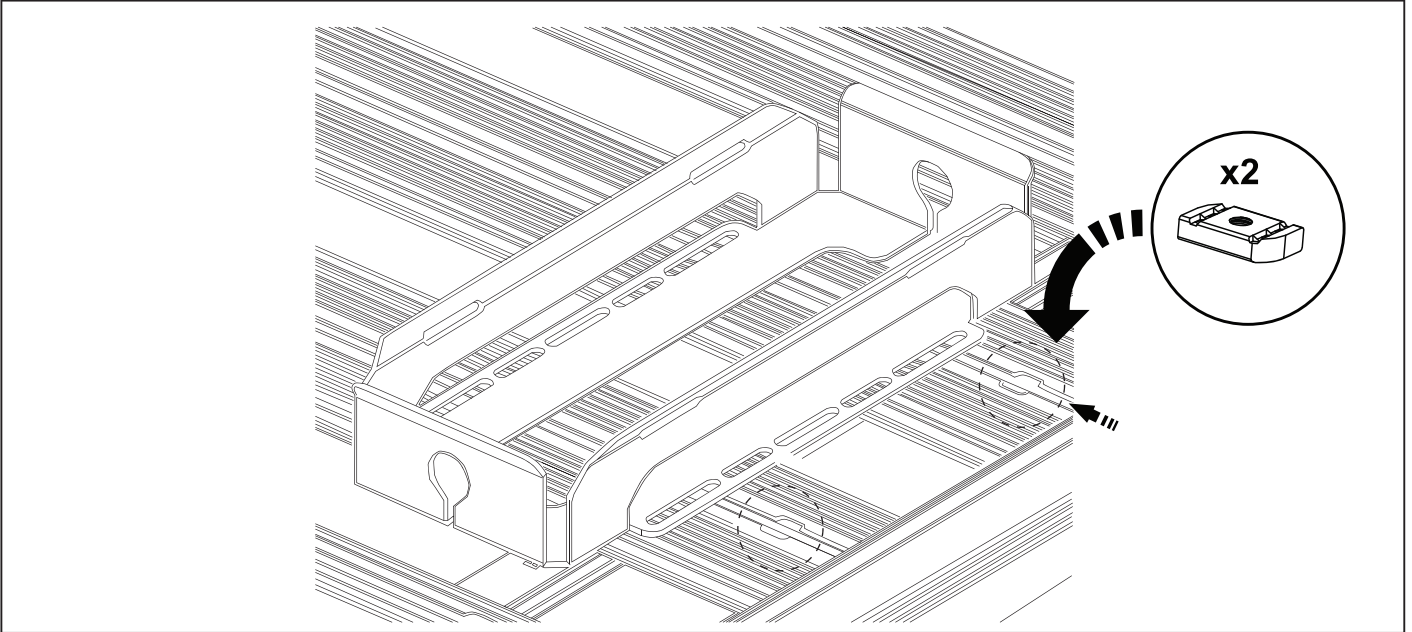INSTALLATION INSTRUCTIONS

1. Insert M8 Washer Plate into Roof Rack track as indicated. Slide to desired position.

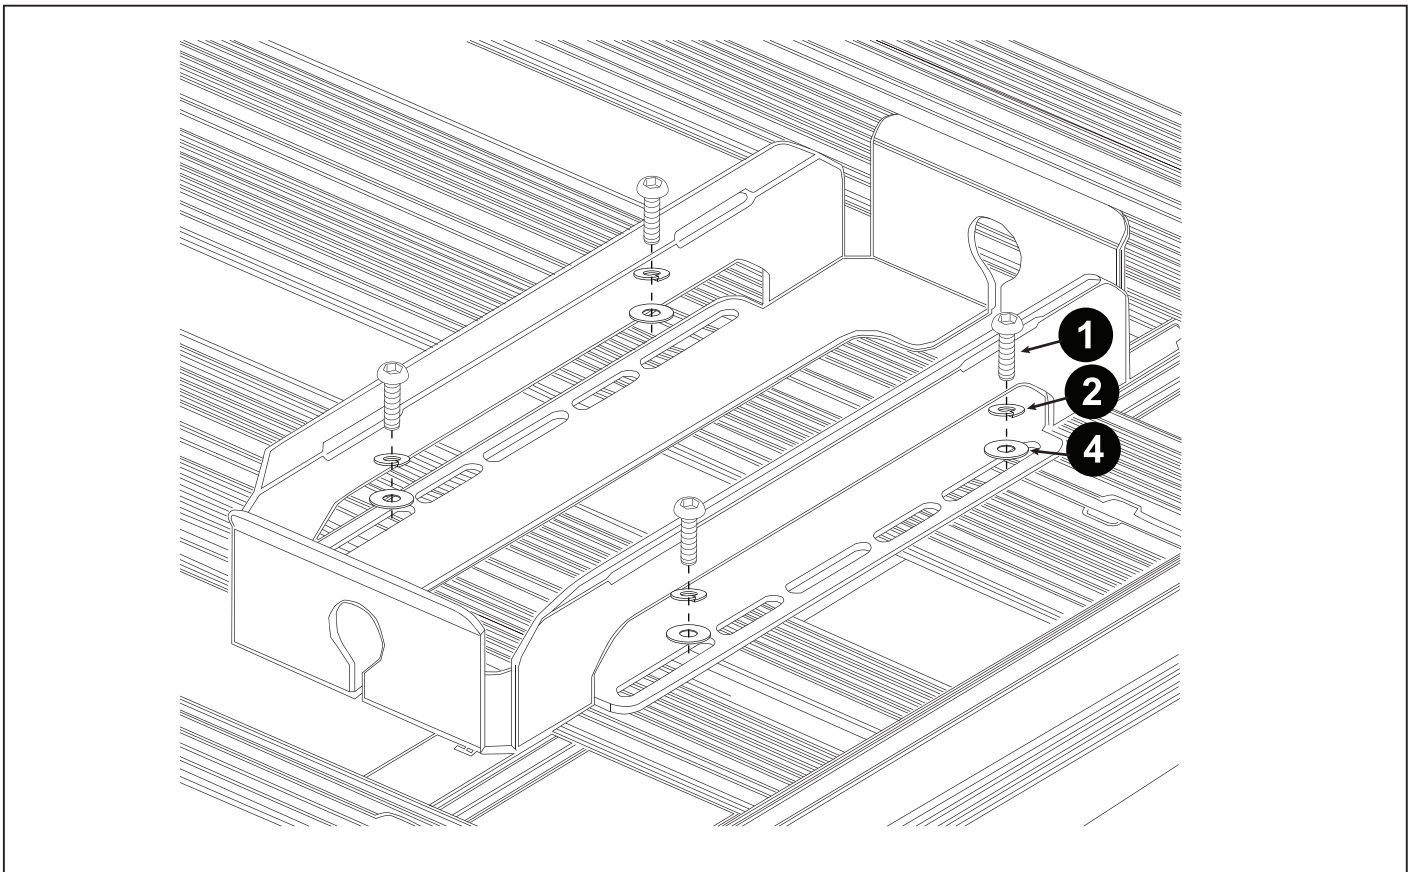

1. Align Bracket with inserted and positioned Washer Plates. Fasten with M10 x 25mm Hex Socket Button Head Screw, D10 Spring Washer and D10 Flat Washer. Repeat for all 4 Washer Plates.

NOTE: Torque screws to fasten into positon.